

FORM PTO-1390  
(REV. 9-2001)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

7266/66308-RDK

U.S. APPLICATION NO. (If known, see 37 CFR 1.5

**10/018676**

INTERNATIONAL APPLICATION NO.  
PCT/JP00/05902

INTERNATIONAL FILING DATE  
30 August 2000 (30.08.00)

PRIORITY DATE CLAIMED  
24 November 1999 (24.11.99)

TITLE OF INVENTION

Biomedical Information Collection Apparatus Using Closed Air Type Sound Sensor

APPLICANT(S) FOR DO/EO/US

Takashima Mitsuru

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11 to 20 below concern document(s) or information included:**

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☐ Other items or information:

531 Rec'd PCT 14 DEC 2001


U.S. APPLICATION NO. 10/018676 INTERNATIONAL APPLICATION NO. \_\_\_\_\_ ATTORNEY'S DOCKET NUMBER \_\_\_\_\_

<b>21. <input checked="" type="checkbox"/> The following fees are submitted:</b> <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. .... <b>\$1040.00</b> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$890.00</b> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$740.00</b> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$710.00</b> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b> <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS PTO USE ONLY</b>	
				\$ 890.00	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$ 130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total claims	5 - 20 =	0	x <b>\$18.00</b>	\$	
Independent claims	1 - 3 =	0	x <b>\$84.00</b>	\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ <b>\$280.00</b>	\$	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
<b>SUBTOTAL =</b>				\$ 1020.00	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
<b>TOTAL NATIONAL FEE =</b>				\$ 1020.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property +				\$	
<b>TOTAL FEES ENCLOSED =</b>				\$ 1020.00	
				Amount to be refunded:	\$
				charged:	\$

- a. ☒ A check in the amount of \$ 1020.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 03-3125. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

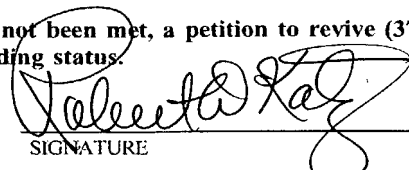  
SIGNATURE  
Robert D. Katz  
NAME  
30,141  
REGISTRATION NUMBER

CLAIMS

1. (Deleted)

2. (As amended) A biomedical information collection apparatus, comprising:

a plurality of closed cabinets made of a metal, rubber, plastics, wood or a like material having air-tightness and placed at positions spaced away from each other, each of said closed cabinets having a variable internal volume;

a spring member placed in each of the interior of said closed cabinets;

a closed air type sound sensor formed from a non-directional microphone or/and pressure sensor for detecting and converting an air pressure in each of said closed cabinets into an electric signal; and

a plate-shaped member placed on said plurality of closed cabinets;

the air pressures in said closed cabinets when a human body is placed on said closed cabinets in a pertaining shape directly or with bedclothes or the like interposed therebetween while air remains in said closed cabinets of the closed air type sound sensors being detected by the non-directional microphones or/and pressure sensors to measure biomedical information such

as the breath, the heart rate (cardiac cycle), or body movements including a cough or a snore of the human body.

3. (As amended) A biomedical information collection apparatus according to claim 2, wherein said non-directional microphone or/and pressure sensor for detecting and converting an air pressure in each of said closed cabinets into an electric signal uses a closed air type sound sensor mounted in each of the interior of said closed cabinets.

4. (As amended) A biomedical information collection apparatus according to claim 2, wherein said non-directional microphone or/and pressure sensor for detecting and converting an air pressure in each of said closed cabinets into an electric signal uses a closed air type sound sensor mounted at an end portion of a hose connected to said closed cabinets.

5. (As amended) A biomedical information collection apparatus according to claim 2, wherein a closed air type sound sensor wherein a microscopic pinhole is provided in each of said closed cabinets to establish an air leak countermeasure to minimize the influence upon said non-directional microphone or/and pressure sensor for detecting and converting an air pressure into an electric signal.

6. (Deleted)
7. (Deleted)
8. (Deleted)
9. (Deleted)
10. (Deleted)
11. (Deleted)
12. (Deleted)
13. (Deleted)

## DESCRIPTION

Biomedical Information Collection Apparatus Using  
Closed Air Type Sound Sensor

## Technical Field

This invention relates to a biomedical information collection apparatus which uses a closed air type sound sensor mounted on a closed cabinet having a variable internal volume to collect biomedical information such as a heart rate, a respiration rate and movements of the body including a cough and a snore.

## Background Art

As a conventional apparatus for collecting biomedical information such as a heart rate, a respiration rate and movements of the body, an apparatus wherein electrodes for detecting various kinds of information are attached to the human body and signals detected by the electrodes are transmitted to a measuring instrument over lead wires to collect biomedical information of the human body is used frequently.

In such a conventional apparatus as described above, since the electrodes for information detection are

attached to the human body, they are liable to be displaced from their original positions during use, resulting in variation of the output signals thereof and the collection lead wires are liable to suffer from disconnection at crossing points of the electrodes or folds of bedclothes, and where commercial power supply is used, there is a danger that, if the collection lead wires should contact with the living organism, then the living organism may receive an electric shock. Further, a lead wire is very likely to act as an antenna and suffer from external electromagnetic wave noise. In this manner, the conventional apparatus has various subjects to be solved. Further, not only accurate information cannot be collected for a long period of time, but also the freedom of the human body is lost owing to electrode fixing instruments and lead wires such that the human body is restricted even from tossing and turning in bed.

As a countermeasure for solving the problems of conventional biomedical signal detection apparatus of the type described, an apparatus disclosed in the official gazette of Japanese Patent Laid-open No. Hei 10-14889 has been proposed.

This apparatus includes body movement measurement means for measuring an oscillation signal of a living

organism based on a series connection electrostatic capacity of a first electrostatic capacity formed between a first electrode and the living organism and a second electrostatic capacity formed between a second electrode and the living organism, and body pressure measurement means for measuring a body pressure signal originating from the weight of the living organism by means of the first or second electrode and a third electrode, and further includes calculation means for calculating a characteristic amount of the living organism such as the body weight, a heart rate, a respiration rate, an active mass or a life condition based on outputs of the body movement measurement means and the body pressure measurement means without adhering a measurement electrode directly to the living organism.

However, the apparatus disclosed in the official gazette of Japanese Patent Laid-Open No. Hei 10-14889 uses an electrostatic capacity type sensor to detect an oscillation signal of a living organism and uses a pressure-sensitive element to detect a body pressure signal originating from the weight of the living organism.

Generally, the electrostatic capacity type sensor is not good in temperature characteristic and exhibits a variation of a signal in a low frequency region in the



proximity of the direct current. Meanwhile, the pressure-sensitive sensor has a creep characteristic and so forth and is low in response speed. In short, the pressure-sensitive sensor is poor in measurement accuracy of the absolute pressure and cannot catch a dynamic high frequency signal. Although it is a possible idea to use a distortion resistive element as the pressure-sensitive sensor, the output signal of the distortion resistive element is greatly dependent on environment such as installation conditions or the temperature. As a result, conventional biomedical signal sensors have a subject to be solved in that they are subject to such a restriction that the user itself performs zero point adjustment or gain adjustment every time a measurement is started, or a protection apparatus for stabilizing the installation environment of the sensor is provided separately, or else the biomedical signal sensor is used only as an on/off switch.

As a method which makes up for the drawback described above, a method has been proposed wherein a flexible closed body such as an air bag is placed under a living organism and a pressure variation in the closed body by a movement of the living organism is measured by a pressure sensor or a microphone to collect biomedical

information.

However, in order to use this method to collect biomedical information in full and over a wide range, the closed body must be laid over a wide area.

Further, it is necessary to keep the internal pressure of the closed body higher than the external air pressure and use the closed body in an expanded condition.

#### Disclosure of Invention

According to the present invention, the problems of the conventional apparatus are solved by realizing a biomedical information collection apparatus wherein a plurality of closed air type sound sensors each formed from a non-directional microphone or/and pressure sensor for detecting and converting an air pressure in each of closed cabinets having air-tightness and each having a variable internal volume into an electric signal are used and a spring member placed in each of the closed cabinets, and the air pressures when a plate-shaped member is placed on the closed air type sound sensors in a state wherein air remains therein and a human body is placed on the plate-shaped member directly or with bedclothes or the like interposed therebetween are detected by the non-directional microphones or/and pressure sensors, whereby

biomedical information such as the breath, the heart rate (cardiac cycle), or body movements including a cough or a snore of the human body can be measured without damaging the freedom of the human body.

With the biomedical information collection apparatus of the present invention, since the plate-shaped member is placed on the plurality of closed air type sound sensors in each of which a spring member is placed, a biomedical signal can be measured accurately over the entire range of the living organism. Therefore, the biomedical information collection apparatus is most suitable for remote supervision of an in-patient in a hospital and so forth.

#### Brief Description of Drawings

FIG. 1 is a schematic view showing an embodiment of a closed air type sound sensor used in the present invention and using a closed cabinet having a variable internal volume;

FIG. 2 is a view showing a conventional biomedical information correction apparatus which uses a pressure sensor;

FIGS. 3 to 5 are views showing states of use of a biomedical information collection apparatus which uses



internal volume, and (b) is a sectional view of the closed cabinet.

Referring to (a) and (b) of FIG. 1, reference numeral 10 denotes a closed cabinet having air-tightness, made of metal, rubber, plastics, wood or the like and having a variable internal volume. Reference character SP denotes a spring member for keeping an internal air gap of the closed cabinet 10. Reference numeral 41 denotes a hose connected to the closed cabinet 10. Reference numeral 21 denotes a non-directional microphone or pressure sensor, and 31 a lead wire for delivering a signal of the non-directional microphone or pressure sensor 21.

A state of arrangement of the spring member SP is described with reference to the sectional view of (b) of FIG. 1. (b) of FIG. 1 shows a cross section taken along plane A-A' of (a) of FIG. 1, and (1), (2), (3) and (4) show examples which use spring members of different structures from one another.

(1) of (b) of FIG. 1 shows an example wherein the interior of the closed cabinet 10 is filled with the spring member SP of continuous foamed sponge having an air permeability to support the air gap in the interior of the closed cabinet 10. In this instance, the side

walls of the closed cabinet 10 are made of a flexible material so as to be movable when the shape of the spring member SP of the foamed sponge varies.

(2) of (b) of FIG. 1 shows an example wherein part of the interior of the closed cabinet 10 is supported by independent foamed sponge elements SP1, SP2 and SP3 to support the air gap in the interior of the closed cabinet 10.

(3) of (b) of FIG. 1 shows an example wherein a plurality of springs SP4, SP5 and SP6 are disposed in the interior of the closed cabinet 10 to support the air gap in the interior of the closed cabinet 10.

(4) of (b) of FIG. 1 shows an example wherein the closed cabinet 10 itself is provided with resiliency by the shape of the surface material of the cabinet to support the air gap in the interior of the closed cabinet 10 and divide the interior of the closed cabinet 10 into a plurality of air chambers.

Reference numeral 21 denotes a non-directional microphone or pressure sensor, and 31 denotes a lead wire for signaling a signal of the non-directional microphone or pressure sensor 21. Reference 41 denotes a hose connected to the closed cabinet 10.

The non-directional microphone or pressure sensor

21 is attached to an end portion of the hose 41.

Air is enclosed in the interior of the closed cabinet 10, and the pressure of the air is transmitted to the non-directional microphone or pressure sensor 21 through the hose 41. The non-directional microphone or pressure sensor 21 converts the internal pressure of the closed cabinet 10 into an electric signal and transmits the electric signal over the lead wire 31.

The closed cabinet 10 has a microscopic pinhole provided therein as an air leak countermeasure for minimizing the influence upon the non-directional microphone or pressure sensor 20 which detects and converts the air pressure into an electric signal.

FIG. 2 is a view showing a state of using a conventional biomedical information collection apparatus which uses a closed air type sound sensor.

Referring to FIG. 2, reference numeral 60 denotes a bed to be used by a person from whom biomedical information is to be collected. Reference numeral 50 denotes an information processing apparatus for collecting and processing biomedical information. Reference numeral 10 denotes a known closed air type sound sensor made of flexible rubber, plastic, cloth or the like. Reference numeral 30 denotes a lead wire for

transmitting a detection signal of the closed air type sound sensor. Reference numeral 70 denotes a person from whom biomedical information is to be collected, and 80 a pillow to be used by the person from whom biomedical information is to be collected.

When it is intended to collect biomedical information such as a heart rate and a respiration rate of an in-patient in a hospital or the like for remote supervision, since it is necessary to perform a measurement for a long period of time, the measurement is performed while the person 70 whose biomedical information is to be collected is in a state wherein the person 70 lies on the bed 60 using the pillow 80. In this instance, the closed air type sound sensor 10 for collecting biomedical information is placed at a position of the back on which the weight of the closed air type sound sensor 10 whose biomedical information is to be collected is applied most, and the person 70 whose biomedical information is to be collected assumes a state where it lies on the closed air type sound sensor 10.

Involuntary mechanical movements such as breath and pulsation of the heart of the person 70 whose biomedical information is to be collected and involuntary mechanical movements of unconscious movements of the body such as



tossing and turning are transmitted through the air enclosed in the interior of the closed air type sound sensor 10 to the non-directional microphone or pressure sensor, by which they are converted into an electric signal.

The electric signal detected by the closed cabinet 10 is transmitted to the information processing apparatus 50 over the lead wire 30, and processing and supervision of the biomedical information are performed by the information processing apparatus 50.

In this method, a signal of a portion of the human body that goes beyond the closed air type sound sensor cannot be extracted readily, and in order to prevent this, it is necessary to make the area of the closed air type sound sensor greater than the size of the human body.

FIG. 3 is a view showing an embodiment of a biomedical information collection apparatus which uses the closed air type sound sensor of the present invention. Referring to FIG. 3, reference numeral 60 denotes a bed to be used by a person whose biomedical information is to be collected. Reference numerals 10 and 20 denote each a closed air type sound sensor having the configuration shown in FIG. 1, and 31 and 32 denote lead wires for transmitting signals detected by the closed air type

sound sensors. Reference numeral 70 denotes a plate-shaped member on which a person whose biomedical information is to be connected is to lie.

The closed air type sound sensors 10 and 20 are placed on the bed 60, and the plate-shaped member 70 is placed on them. The closed air type sound sensors 10 and 20 are placed at the opposite end portions of the plate-shaped member 70 and are set in such a positional relationship that the plate-shaped member 70 is supported by the closed air type sound sensors 10 and 20. In the case of the embodiment of FIG. 3, since a person whose biomedical information is to be collected lies on the closed air type sound sensors 10 and 20, even when the person whose biomedical information is to be collected in a state wherein the person lies on the plate-shaped member 70 changes the position of the body thereof by tossing and turning or the like, the biomedical information can be collected stably.

FIG. 4 is a view showing another embodiment of the biomedical information collection apparatus which uses the closed air type sound sensor of the present invention. Referring to FIG. 4, reference numeral 60 denotes a bed to be used by a person whose biomedical information is to be collected. Reference numerals 10, 20, 30 and 40 denote

each a closed air type sound sensor having the configuration shown in FIG. 1. Reference numerals 31 and 32 denote lead wires for transmitting signals detected by the closed air type sound sensors, and 41 and 42 air pipes. Reference numeral 70 denotes a plate-shaped member on which a person whose biomedical information is to be collected is to lie.

The closed air type sound sensors 10, 20, 30 and 40 are placed at the four corners of the bed 60, and the plate-shaped member 70 is placed on them. The closed air type sound sensors 10, 20, 30 and 40 are placed at the four corners of the plate-shaped member 70 and set in such a positional relationship that the plate-shaped member 70 is supported by the closed air type sound sensors 10, 20, 30 and 40. In this instance, where closed air type sound sensors in each of which a sound sensor is provided in the interior of an air gap are used, if the air chambers of the closed air type sound sensors 10 and 30 and the air chambers of the closed air type sound sensors 20 and 40 are connected to each other by the air pipes 41 and 42, respectively, then it is possible to commonly use non-directional microphones or pressure sensors provided for the closed air type sound sensors 10 and 30 or 20 and 40 for detecting an air pressure. Also

it is possible to interpose the closed air type sound sensors 10, 20, 30 and 40 in legs at the four corners of the bed 60.

Also where another closed air type sound sensor wherein a sound sensor is provided outside the air gap is used for the closed air type sound sensors 10, 20, 30 and 40, non-directional microphones or pressure sensors for detecting the air pressures of the air chambers of the closed air type sound sensors 10 and 30 or 20 and 40 can be used commonly.

In the case of the embodiment of FIG. 4, since a person whose biomedical information is to be collected lies on the closed air type sound sensors 10, 20, 30 and 40 with the plate-shaped member 70 interposed therebetween, even when the person whose biomedical information is to be collected in a state wherein it lies on the plate-shaped member 70 changes the position of the body by tossing and turning or the like, stable biomedical information can be collected at all times.

It is to be noted that, while, in the description of FIGS. 3 and 4, examples are described wherein a closed air type sound sensor is placed on the bed 60 and the plate-shaped member 70 is placed on the closed air type sound sensor, the closed air type sound sensor and the

plate-shaped member 70 placed on the same need not necessarily be placed on the bed 60 but may be placed directly on a mat or the floor.

FIG. 5 is a view showing a further embodiment of a biomedical information collection apparatus which uses the closed air type sound sensor of the present invention. Referring to FIG. 5, reference numeral 70 denotes a plate-shaped member on which a person whose biomedical information is to be collected is to lie. Reference numerals 51, 52, 53 and 54 denote support posts for the plate-shaped member 70. Each of the support posts 51, 52, 53 and 54 is a closed air type sound sensor formed from a cabinet in which air is enclosed. In the air chamber of each of the support posts 51, 52, 53 and 54, a unique non-directional microphone or pressure sensor for detecting the air pressure of the air chamber can be provided. In this instance, an optimum one of signals of the sensors of the support posts can be selectively used. Also it is possible to connect the air chambers of the support posts 51, 52, 53 and 54 to one another by an air pipe 4 such that a single non-directional microphone or pressure sensor can be used commonly.

In the case of the embodiment of FIG. 5, since the closed air type sound sensors for collection of

biomedical information support the plate-shaped member 70 at the four corners by means of the support posts each formed from a cabinet in which air is enclosed, also when the person whose biomedical information is to be collected in a state wherein it lies on the plate-shaped member 70 changes the position of the body by tossing and turning or the like, the biomedical information can be collected more stably.

The biomedical information collection apparatus which uses the closed air type sound sensor of the present invention is most suitable for remote supervision of an in-patient in a hospital or the like because it grasps the breath, the pulsation of the heart and body movements including a cough and a snore generally as a superimposed signal in a state wherein it does not restrict the behavior of the person lying on the plate-shaped member at all and can perform selection and analysis of the body movement times depending upon the amplitude and selection and analysis of the breath and pulsation of the heart depending upon the frequency.

The biomedical information detected by the closed air type sound sensor used in the biomedical information collection apparatus of the present invention includes involuntary mechanical movements such as the breath and

the pulsation of the heart. The biomedical information further includes involuntary mechanical movements such as unconscious body movements such as tossing and turning, and during sleeping, also the unconscious body movements are significant information as a vigilance level.

In the remote supervision of an in-patient in a hospital or the like, it is possible to automatically detect from the state of biomedical information of the breath, respiration rate and so forth of the in-patient that the patient has fallen asleep and perform such an operation as to extinguish the light of the sickroom, switch off the television or adjust the sound volume of the radio set. Further, by incorporating the apparatus of the present invention into an article for daily use such as a bed, a chair, a carpet, a bathtub or a seat on a toilet bowl with which a living organism contacts, the condition of the health of the living organism can be discriminated without imparting an unfamiliar feeling to the living organism itself. It is known that an ordinary person who acts in the daytime exhibits the lowest temperature of a deep portion of the human body during sleeping around six o'clock in the morning, and essential biomedical information which is not influenced by the activity is obtained and can be coordinated with a cold

or metabolism information such as a female periodic sexual hormone change.

FIG. 6 shows an example of an output signal of the non-directional microphone of the closed air type sound sensor 10.

The axis of abscissa indicates the time (Sec), the axis of ordinate indicates the level (V) of the output signal. A portion of the output signal which exhibits a great variation in FIG. 6 indicates an involuntary mechanical movement BMT of unconscious body movements such as turning of the person 70 whose biomedical information is to be collected. Meanwhile, another portion of the output signal which exhibits a stable level and exhibits small variations indicates an involuntary mechanical movement such as breath or pulsation of the heart of the person 70 whose biomedical information is to be collected.

FIG. 7 shows a signal S1 which is an enlarged signal of a portion of the output signal of the non-directional microphone of the closed air type sound sensor 10 shown in FIG. 6 within which the level is stable and exhibits small variations (portion surrounded by a circle in FIG. 6) and another signal S2 obtained by differentiating the signal at the portion.



A periodical signal in a high level of the waveform of the signal S2 obtained by differentiating the output signal of the non-directional microphone of the closed air type sound sensor 10 indicates a heart beat period, and the interval between a periodical signal of a high level and a periodical signal of an intermediate level indicates a left ventricular ejection time.

In this manner, various kinds of biomedical information can be obtained continuously over a long period of time from the output signal of the non-directional microphone of the closed air type sound sensor 10.

FIG. 8 is a block diagram showing an example of a signal processing circuit for processing the output signal of the closed air type sound sensor 10 to obtain various kinds of biomedical information.

Referring to FIG. 8, reference character PT denotes the non-directional microphone of the closed air type sound sensor 10, which outputs such a signal as shown in FIG. 6.

Reference character LV denotes a level detection circuit, which outputs a pulse A when the output of the non-directional microphone PT exceeds a predetermined level. Reference character LP denotes a low-pass filter,



filter LP and differentiation amplifier DF.

A pulse outputted from the level detection circuit LV is supplied as a start signal to the timer TM1 and applied also to the counter CU1.

The counter CUI outputs a pulse of a different polarity each time it receives the pulse A outputted from the level detection circuit LV and is a preset counter which operates such that it outputs a pulse of the negative polarity when it receives the first pulse from the level detection circuit LV and then outputs a pulse of the positive polarity when it receives the next pulse.

The timer TM1 measures a period of time after it receives a positive polarity pulse from the level detection circuit LV until it receives a positive polarity pulse from the counter CU1, and outputs the measurement value as a body movement time BMT.

The output of the low-pass filter LP is applied to the maximum value detector DT1, and a pulse outputted from DT1 is supplied as a start signal to the timer TM2 and is further applied to the counter CU2.

The timer TM2 measures a period of time after it receives a positive polarity pulse A from the maximum value detector DT until it receives a positive polarity pulse F from the counter CU2, and outputs the measurement

The output signal of the differentiation amplifier DF is connected to the maximum value detector DT2.

A pulse outputted from the maximum value detector DT2 is supplied as a start signal to the timer TM3 and is further applied to the counter CU3. The timer TM3 measures a period of time after it receives a positive polarity pulse from the maximum value detector DT2 until it receives a positive polarity pulse from the counter CU3, and outputs the measurement value as a cardiac cycle RR.

The timer TM4 starts in response to a pulse outputted from the maximum value detector DT2 and switches ON the switch SW1 only for a period of time equal to  $1/n$  the cardiac cycle RR prior by one heart beat measured by the timer TM3 and stored so that only an aortic valve closing sound is detected by the maximum value detector DT3 and applied as a stop signal to the timer TM4. Then, the measurement value of the timer TM4 is outputted as a left ventricular ejection time ET.

Operation of the circuit of FIG. 8 having such a configuration as described above is such as follows.

Such an electric signal of biomedical information as shown in FIG. 6 or as indicated by S1 in FIG. 7 is

outputted from the non-directional microphone PT. This signal indicates such involuntary mechanical movements such as the breath and the pulsation of the heart of the person 70 whose biomedical information is to be collected.

The level detection circuit LV outputs a pulse A when the electric signal of the output of the non-directional microphone PT exceeds a predetermined level, that is, when some body movement occurs with the person 70 whose biomedical information is to be collected, outputs the pulse A and supplies to the timer TM1. In response to the pulse A, the timer TM1 starts a measurement of the body movement time BMT.

The timer TM1 measures the period of time after it receives the pulse A from the level detection circuit LV until it receives a pulse B from the counter CU1, that is, the body movement time BMT of the person 70 whose biomedical information is to be collected shown in FIG. 6, and outputs the measurement value.

High frequency components of the electric signal of the output of the non-directional microphone PT originating from body movements and so forth are removed by the low-pass filter LP, and a maximum value of the electric signal, that is, a body movement of the person 70 whose biomedical information is to be collected

originating from the breath, is detected by the maximum value detector DT1 and a pulse A is outputted from the same.

The timer TM2 measures the period of time after it receives the pulse A from the maximum value detector DT1 until it receives the pulse B from the counter CU2, that is, the breath period RP shown in FIG. 6, and outputs the measurement value.

The electric signal of the output of the non-directional microphone PT is differentiated by the differentiation amplifier DF so that it is converted into such a signal as indicated by S2 of FIG. 7, and a maximum value of the differentiation signal is detected by the maximum value detector DT2.

The timer TM3 measures the period of time after it receives the pulse A from the maximum value detector DT2 until it receives the pulse B from the counter CU3, that is, the cardiac cycle RR shown in FIG. 7, and outputs the measurement value.

Further, the timer TM4 switches ON the switch SW1 only for a period of time equal to  $1/n$  the cardiac cycle RR prior by one heart beat after it receives the pulse A from the maximum value detector DT2, and measures the period of time until it receives the pulse B from the

maximum value detector DT3, that is, the left ventricular ejection time ET shown in FIG. 7, and outputs the measurement value.

Various kinds of biomedical information can be obtained by processing the output signal of the closed air type sound sensor 10 by means of the signal processing circuit in this manner.

#### Industrial Applicability

The biomedical information collection apparatus of the present invention can be used for a long period of time for both of an elderly person or a serious case weakened in physical fitness and conversely a living organism who moves actively because it uses a plurality of closed air type sound sensors each having a spring member in the interior thereof and can collect biomedical information from the overall area of a plate-shaped member placed on the closed air type sound sensors.

If the biomedical information collection apparatus which uses the closed air type sound sensor of the present invention is used together with short or long distance communication means, it is useful also as a monitor for an in-patient of a hospital, a monitor for a patient under medical treatment at home or a monitor

during sleeping of a healthy person and can be applied also for detection of apnea syndrome, arrhythmia during sleep and so forth. Further, it can be used also for observation of a variation of the heart rate or the breath arising from a cold, a change in hormone or fever. Furthermore, it allows also determination of the depth of sleep (REM sleep, NONREM sleep) and can provide a good timing for wakeup as well.



## CLAIMS

1. A biomedical information collection apparatus, comprising:

a flexible sheet-shaped air bag made of gum, plastics, cloth or a like material having air tightness;

a closed air type sound sensor formed from a non-directional microphone or/and pressure sensor for detecting and converting an air pressure in said airbag into an electric signal;

the air pressure in said air bag when a human body is placed on said air bag in a pertaining shape directly or with bedclothes or the like interposed there between while air remains in said closed air bag of the closed air type sound sensors being detected by the non-directional microphone or/and pressure sensor to measure biomedical information such as the breath, the heart rate (cardiac cycle), or body movement including a cough or a snore of the human body.

2. A biomedical information collection apparatus, comprising:

a closed cabinet made of a metal, rubber, plastics, wood or a like material having air tightness, each of said closed cabinets having a variable internal volume;

a closed air type sound sensor formed from a non-

directional microphone or/and pressure sensor for detecting and converting an air pressure in said closed cabinet into an electric signal;

the air pressures in said closed cabinet when a human body is placed on said closed cabinet in a pertaining shape directly or with bedclothes or the like interposed therebetween while air remains in said closed cabinet of the closed air type sound sensor being detected by the non-directional microphone or/and pressure sensor to measure biomedical information such as the breath, the heart rate (cardiac cycle), or body movements including a cough or a snore of the human body.

3. A biomedical information collection apparatus according to claim 1 and 2, wherein said non-directional microphone or/and pressure sensor for detecting and converting an air pressure in said air bag or closed cabinet into an electric signal is mounted in the interior of said closed cabinets.

4. A biomedical information collection apparatus according to claim 1 and 2, wherein said non-directional microphone or/and pressure sensor for detecting and converting an air pressure in said air bag or closed cabinet into an electric signal is mounted at an end portion of a hose connected to said air bag or closed

cabinet.

5. A biomedical information collection apparatus according to claim 2, wherein a closed air type sound sensor wherein a microscopic pinhole is provided in said air bag or closed cabinet to establish an air leak countermeasure to minimize the influence upon said non-directional microphone or/and pressure sensor for detecting and converting an air pressure into an electric signal.

6. A biomedical information collection apparatus, comprising:

a flexible sheet-shaped air bag formed of plurality of air chamber made of gum, plastics, cloth or like material having air tightness;

a plurality of closed air type sound sensor formed from a non directional microphone or/and pressure sensor for detecting and converting an air pressure in each of said air chamber into an electric signal;

air pressure in said closed air bag when a human body is place on said air bag in a pertaining shape directly or with bedclothes or the like interposed there between while air remains in said plurality of air-chambers of the air bag of the closed air type sound sensors being detected by the non-directional microphone

or/and pressure sensor to measure biomedical information such as the breath, the heart rate(cardiac cycle), or body movements including a cough or a snore of the human body.

7. A biomedical information collection apparatus, comprising:

a plurality of closed cabinet made of metal, rubber, plastics, wood or like material having air tightness, each of said closed cabinets having a variable internal volume;

a closed air type sound sensor formed from a plurality of non-directional microphones or/and pressure sensors for detecting and converting an air pressure in each of said closed cabinet into an electric signal;

air pressure in said closed cabinet when a human body is place on said closed cabinets in a pertaining shape directly or with bedclothes or the like interposed therebetween while air remains in said plurality of the closed air type sound sensors being detected by the non directional microphone or/and pressure sensor to measure biomedical information such as the breath, the heart rate(cardiac cycle), or body movements including a cough or a snore of the human body.

8. A biomedical information collection apparatus according to claim 6 and 7, wherein said plurality of

non-directional microphone or/and pressure sensor for detecting and converting an air pressure in each of said air chambers or closed cabinets into an electric signal are mounted in each of the interior of said air chambers or closed cabinets.

9. A biomedical information collection apparatus according to claim 6 and 7, wherein said plurality of non directional microphone or/and pressure sensor for detecting and converting an air pressure in each of said air bags or closed cabinets into an electric signal are mounted at an end portion of a hose connected to said closed air chambers or cabinets.

10. A biomedical information collection apparatus according to claim from 6 to 9, wherein most prominent signal having specific frequency relating to biomedical information is selected from outputs of plurality of non-directional microphone or pressure sensor.

11. A biomedical information collection apparatus, comprising:

a flexible sheet-shaped airtight air bag made of gum, plastics, cloth or a like material, or a closed cabinet made of metal, rubber, plastics, wood or a like material and having a variable internal volume;

a closed air type sound sensor formed from a non-

directional microphone or/and pressure sensor for detecting and converting an air pressure in each of air-bag or closed cabinet into an electric signal;

a plate-shaped member placed on said air bag or closed cabinet while air remains in said air bag or closed cabinet;

the air pressure in said closed air bag or closed cabinet when a human body is placed on said plate-shaped member being detected by the non-directional microphones or/and pressure sensor to measure bio medical information such as the breath, the heart rate (cardiac cycle), or body movements including cough or a snore of the human body.

12. A biomedical information collection apparatus, comprising:

a flexible sheet-shaped airtight air bag made of gum, plastics, cloth or a like material, or closed cabinet made of metal, rubber, plastics, wood or a like material and having a variable internal volume;

a closed air type sound sensor formed from a non-directional microphone or/and pressure sensor for detecting and converting an air pressure in each of air-bag or closed cabinet into an electric signal;

a plate-shaped member placed on plurality of sheet-

shaped air bag or closed cabinet of closed air type sound sensor while air remains in said air bag or closed cabinet;

the air pressure in said closed air bag or closed cabinet when a human body is placed on said plate-shaped member being detected by the non-directional microphones or/and pressure sensor to measure bio medical information such as the breath, the heart rate (cardiac cycle), or body movements including cough or a snore of the human body.

13. A biomedical information collection apparatus, comprising:

a flexible sheet-shaped airtight air bag made of gum, plastics, cloth or a like material, or a closed cabinet made of metal, rubber, plastics, wood or a like material and having a variable internal volume;

a closed air type sound sensor formed from a non-directional microphone or/and pressure sensor for detecting and converting an air pressure in each of air-bag or closed cabinet into an electric signal;

the air pressure in said air bag or closed cabinet when closed air type sound sensor are put under bed, chair, bathtub or stool. being detected by non-directional microphone or/and sound sensor to measure

(19) 世界知的所有権機関  
国際事務局



(43) 国際公開日  
2001 年 5 月 31 日 (31.05.2001)


PCT

(10) 国際公開番号  
WO 01/37731 A1

- (51) 国際特許分類: A61B 5/11, 5/02 (72) 発明者; および  
(75) 発明者/出願人 (米国についてのみ): 高島 充  
(TAKASHIMA, Mitsuru) [JP/JP]; 〒141-0001 東京都品川区北品川5-13-7 株式会社 エム・アイ・ラボ内 Tokyo (JP).
- (21) 国際出願番号: PCT/JP00/05902
- (22) 国際出願日: 2000 年 8 月 30 日 (30.08.2000)
- (25) 国際出願の言語: 日本語 (74) 代理人: 高橋光男(TAKAHASHI, Mitsuo); 〒141-0022 東京都品川区東五反田2-3-3 Tokyo (JP).
- (26) 国際公開の言語: 日本語 (81) 指定国 (国内): AU, BR, CA, CN, IL, IN, KR, MX, NO, RU, US.
- (30) 優先権データ:  
特願平 11/332842  
1999 年 11 月 24 日 (24.11.1999) JP  
特願平 2000-99587  
2000 年 3 月 31 日 (31.03.2000) JP
- (71) 出願人 (米国を除く全ての指定国について): 株式会社 エム・アイ・ラボ (M.I. LABORATORIES CORPORATION) [JP/JP]; 〒141-0001 東京都品川区北品川 5-13-7 Tokyo (JP).
- (84) 指定国 (広域): ヨーロッパ特許 (AT, BE, CH, DE, DK, ES, FI, FR, GB, IT, NL, SE).
- 添付公開書類:  
— 国際調査報告書
- 2 文字コード及び他の略語については、定期発行される各 PCT ガゼットの巻頭に掲載されている「コードと略語のガイダンスノート」を参照。

(54) Title: BIOLOGICAL INFORMATION COLLECTING DEVICE COMPRISING CLOSED PNEUMATIC SOUND SENSOR

(54) 発明の名称: 密閉空気式音センサを使用した生体情報収集装置

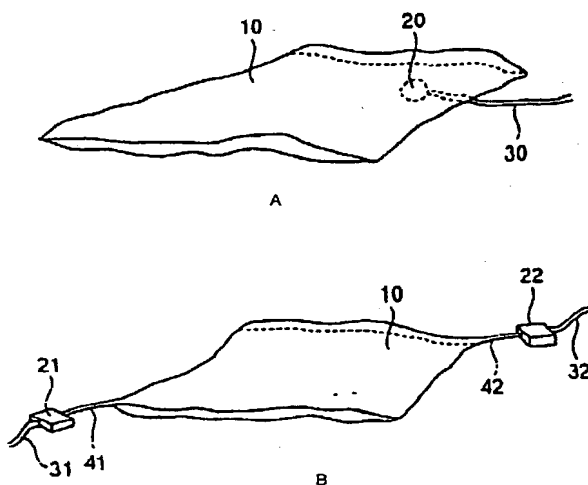

(57) Abstract: Conventionally, when a biological information collecting device is used for measurement, an electrode is directly attached to a human body, accurate information cannot be collected and measurement through a lead wire is performed, for long time constraining the human body because of the lead wire. A device proposed to solve the problem comprises a capacitive sensor used for detecting a signal from the human body, and therefore the temperature characteristics are not good, bringing out a drawback that the signal varies in a low-frequency range. A biological information collecting device according to the invention comprises a closed pneumatic sound sensor having a gas-tight air bag made of soft rubber, plastic, or cloth or a cabinet made of metal, rubber, plastic, or wood. Biological information about the respiration, the cardiac rate (cardiac cycle), and the body movement due to, e.g. a cough or a snore is collected by a microphone of a pressure sensor to perform measurement without constraining the human body, thereby solving the problem of the conventional devices.

[続葉有]



biomedical information such as the breath, the heart rate  
(cardiac cycle), or body movement including cough or a  
sore of the human body.

FIG. 6, from left

Body movement time BMT

Breath period RP

FIG. 7, from above

Cardiac cycle RR

Left ventricular ejection time ET

FIG. 8

PT ... microphone output signal

LV ... Level detection circuit

LP ... Low-pass filter

DF ... Differentiation amplifier

DT1 ... Maximum value detector

DT2 ... Maximum value detector

CU1 ... Counter

CU2 ... Counter

In TM1, upper ... Start

In TM1, lower ... Stop

In TM2, upper ... Start

In TM2, lower ... Stop

CU3 ... Counter

DT3 ... Maximum value detector

In TM3, upper ... Start

In TM3, lower ... Stop

In TM4, upper ... Start

In TM4, lower ... Stop

FIG. 1A

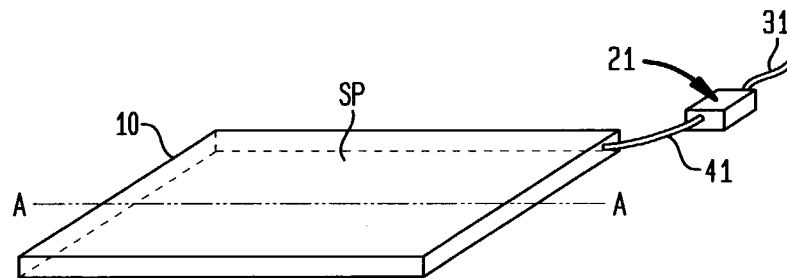


FIG. 1B

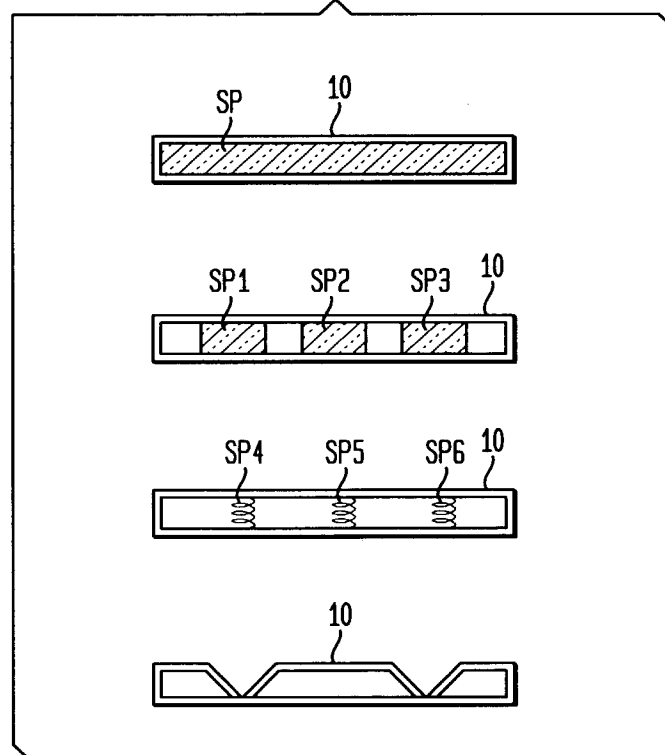


FIG. 2


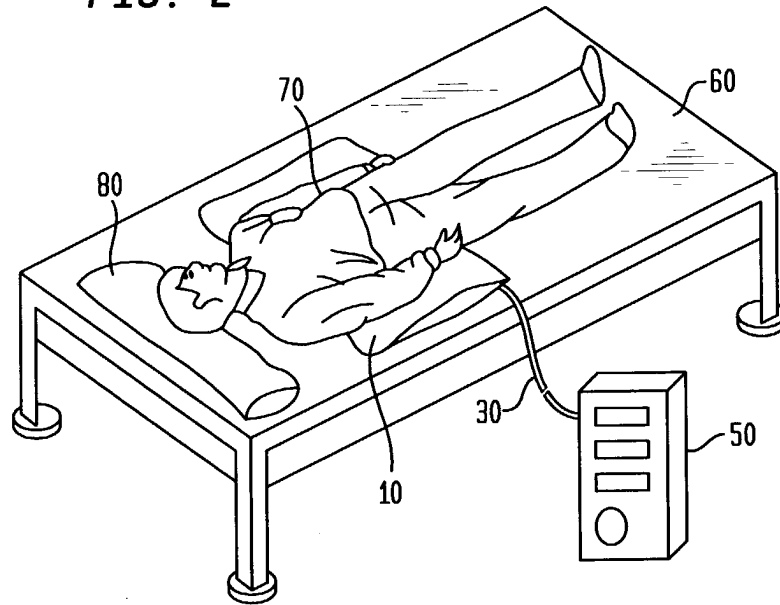


FIG. 3

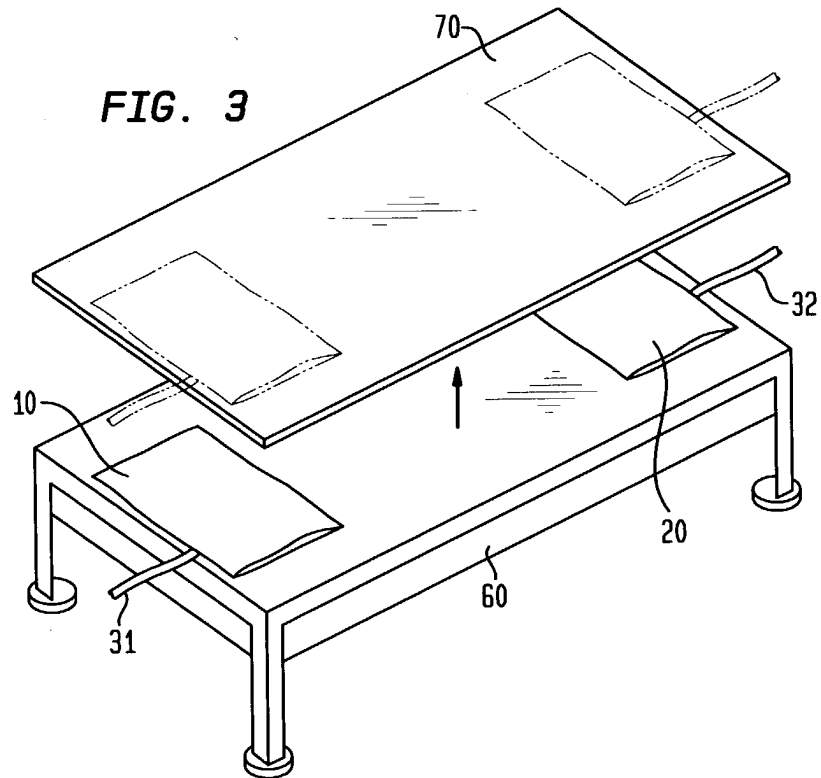

3/6

FIG. 4

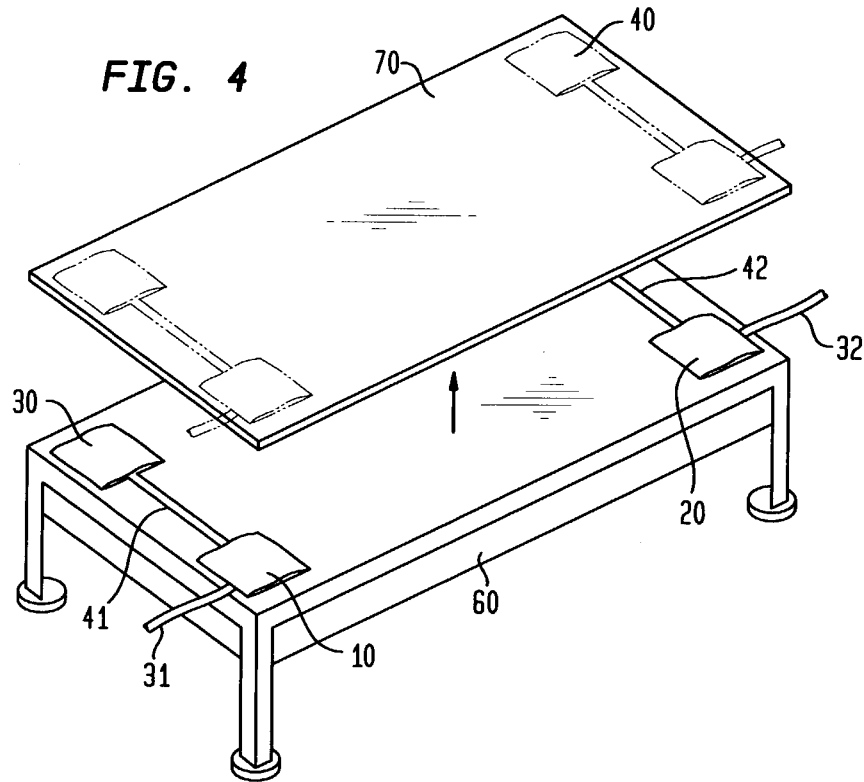


FIG. 5

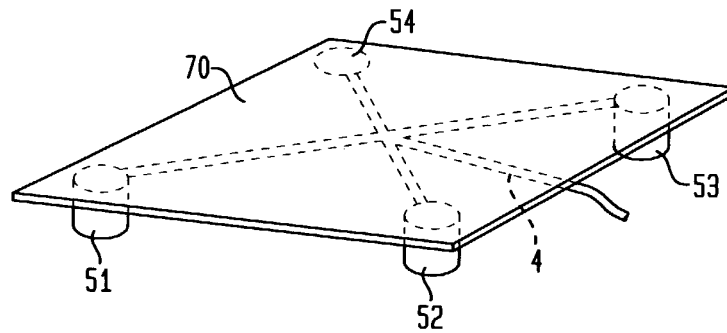


FIG. 6



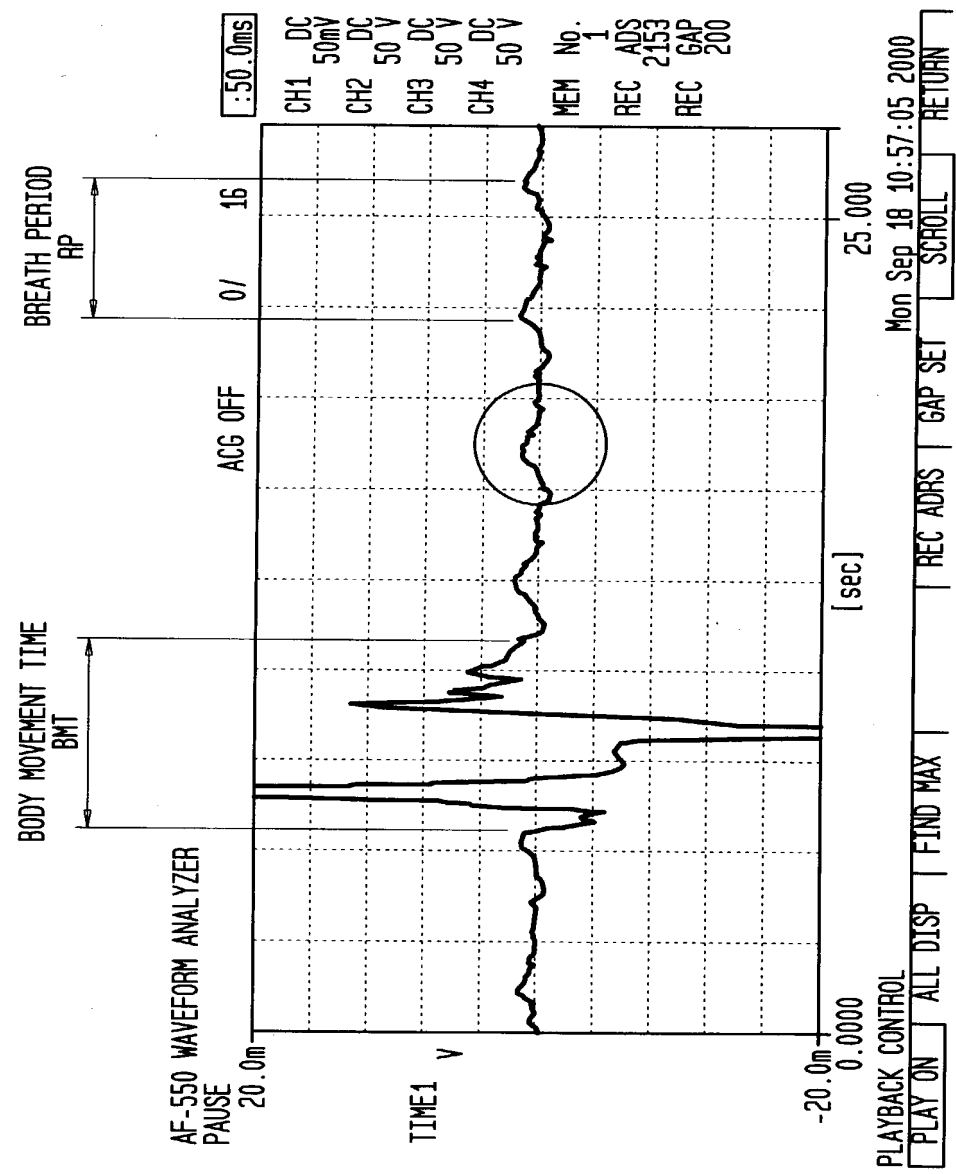


FIG. 7



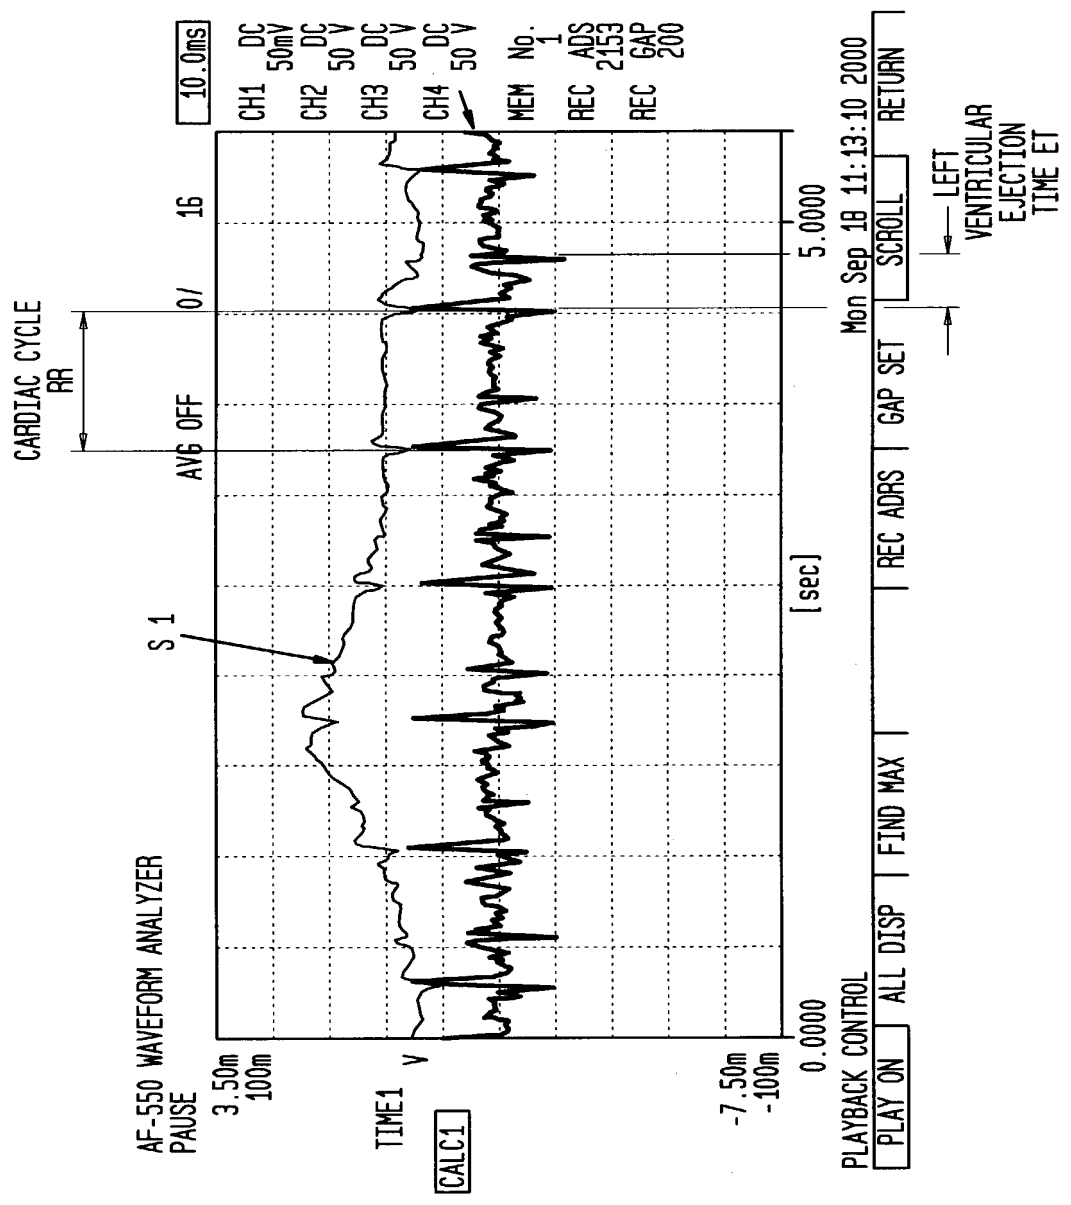

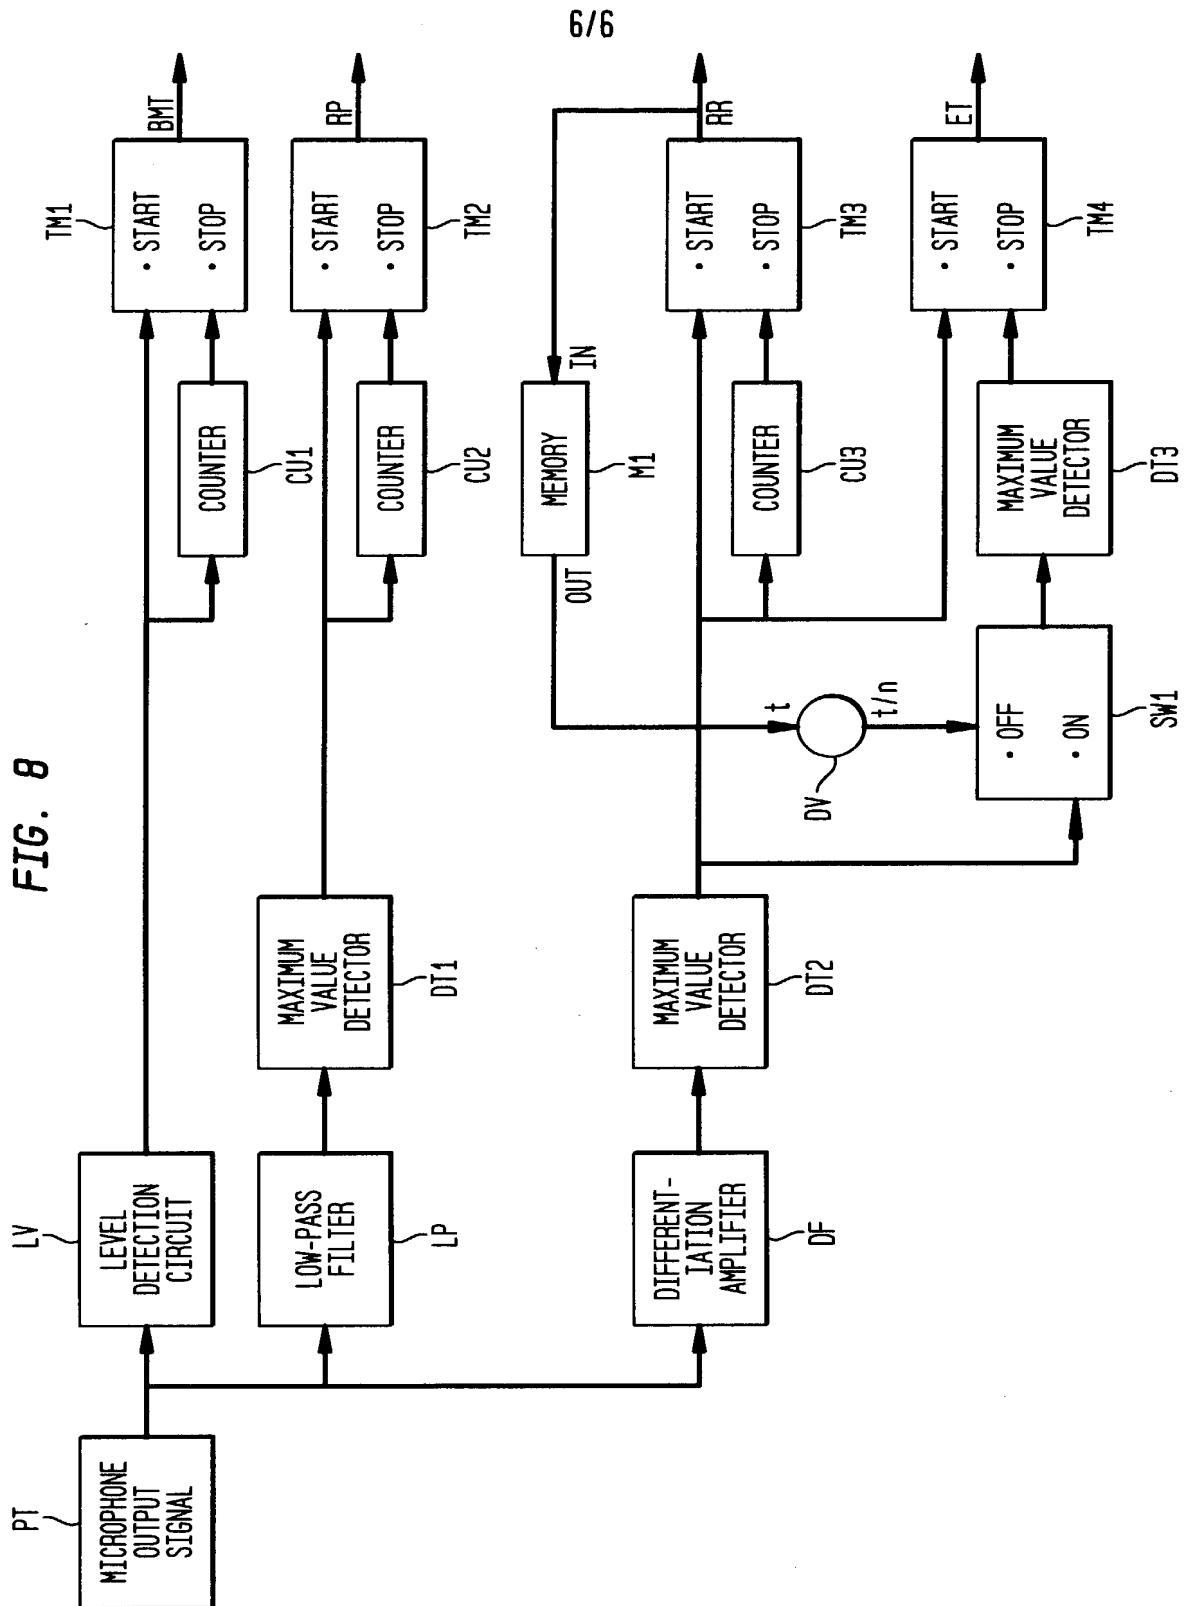

**DECLARATION AND POWER OF ATTORNEY**

#4

*As a below-named inventor, I hereby declare that:*

*My residence, post office address, and citizenship are as stated below next to my name.*

*I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:*

**BIOMEDICAL INFORMATION COLLECTION  
APPARATUS USING CLOSED AIR TYPE SOUND SENSOR**

*the specification of which:*  
(check one)

X is attached hereto.

X was filed on December 14, 2001

Application Serial No. 10/018,676

and was amended by \_\_\_\_\_  
(if applicable)

*I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.*

*I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.*

*I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:*

*Prior Foreign Application(s)*

*Priority Claimed*

<u>Number</u>	<u>Country</u>	<u>Filing Date</u>	<u>Yes</u>	<u>No</u>
<u>PCT/JP00/05902</u>	<u>Japan</u>	<u>11/24/1999</u>	<u>X</u>	

Declaration and Power of Attorney

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
_____	_____	_____
_____	_____	_____
_____	_____	_____

And I hereby appoint **Robert D. Katz** (Reg. No. 30141); **Ivan S. Kavrukov** (Reg. No. 25161); **Christopher C. Dunham** (Reg. No. 22031); **Norman H. Zivin** (Reg. No. 25385); **John P. White** (Reg. No. 28678); **Peter J. Phillips** (Reg. No. 29691); and **Richard F. Jaworski** (Reg. No. 33515), and each of them, all c/o Cooper & Dunham LLP of 1185 Avenue of the Americas, New York, New York 10036 (Tel. 212-278-0400), my attorneys, each with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent, to transact all business in the Patent and Trademark Office connected herewith and to file any International Applications which are based thereon under the provisions of the Patent Cooperation Treaty.

Please address all communications, and direct all telephone calls, regarding this application to:

Robert D. Katz Reg. No. 30,141

Cooper & Dunham LLP  
1185 Avenue of the Americas  
New York, New York 10036  
Tel. (212) 278-0400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or

first joint inventor Takashima Mitsuru


Inventor's signature Mitsuru Takashima

Citizenship JAPAN Date of signature 24/05/02

Residence 13-7, Kitashinagawa, 5-chome, Shinagawa-ku, Tokyo, JAPAN JPX

Post Office Address Same as Residence

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

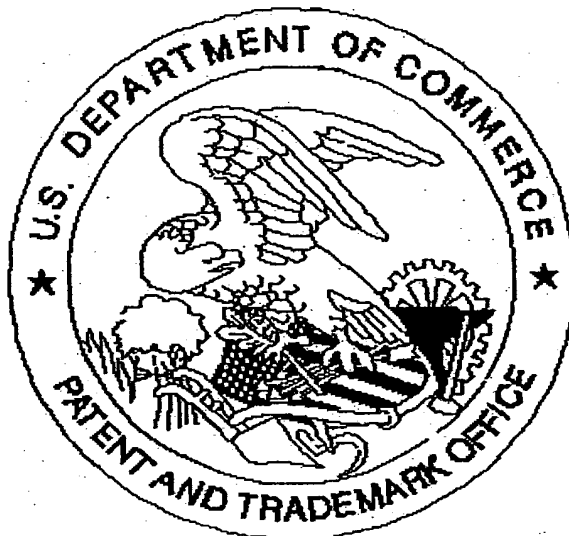

Application deficiencies found during scanning:

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not  
present  
for scanning. (Document title)

*Only 6 pages of drawings not 8*

☐ *Scanned copy is best available.*